
TITAN CO2 REVOLVER

6mm AIRSOFT Ver. **GEL BALL Ver.**



▲ For Your Safety, Keep Hands And Face Away From Escaping CO2 Gas

▲ Always Point The Pistol's Muzzle At A Safe Direction

WARNING

1.Do not change, alter, remove, or obliterate any colorations or makings on this gun. The colorations and makings of this product are designed to comply with the laws and regulations of state, federal, and nation.

2.This product could be mistaken as a firearm easily by law enforcement officers or others. Anyone who changes, alters, removes, or obliterate any colorations or makings are supposed to meet the state or federal laws and regulations. In any way that makes this product look like a real firearm is a crime.

Displaying and exposing of this product in any "public places" may cause confusion or even be considered as a crime. The term of "public place" means any areas that opened to the public, including streets, sidewalks, bridges, alleys, plazas, parks, driveways, front yards, parking lots or even automobiles. Buildings that serve food and drink, or provide entertainment, and the doorways and entrances to buildings or dwellings are parts of public places as well.

Any person who uses this product in the means of bully, insult, threat or deterrent to cause either physical or mental trauma of another is considered illegal and could result in sentence of imprisonment.



PULL UP THE GRIP COVER.

Gel Ball Ver

BULLETS.





LOAD BB /GEL INTO THE TOP OF PUT SIX BULLETS IN THE BB LOADER.



TURN THE BUTTOM LOCK

CLOCKWISE TO ACTIVATE.

PUSH AND TURN THE RELEASE AXLE CLOCKWISE TO LOCK THE BULLETS.



PUSH THE SAFETY / CYLMDER RELEASE FORWARD AND PUSH THE CYLINDER OUT FROM THE FRAME



INSERT BB LOADER INTO THE CYLINDER AND RELEASE IT.



PUT THE CYLINDER BACK.

Titan Revolver Series













6 INCHES SERIES UPPER/LOWER RAIL INSTALLATION



Knock out the spring pin of the REAR SIGHT from the right side. REAR SIGHT.



Remove REAR SIGHT.



Slide the UPPER RAIL from the rear





Put the REAR SIGHT back on and lock.



Knock in the spring pin of the REAR SIGHT then finished.




Slide the DOWN RAIL in.

Lock the screw



Lock the screw.

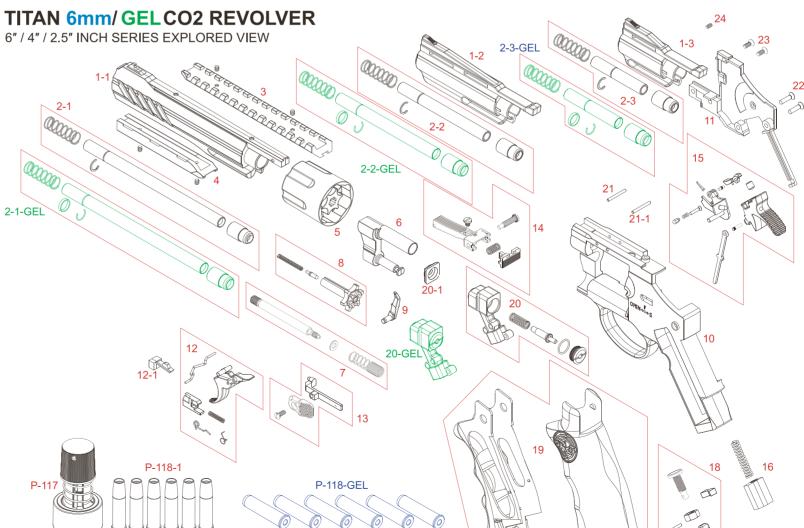



www.starrainbow.com.tw